





Lens Point

LENS POINT (INDIA) PVT. LTD.

60°

Flood Light Lens

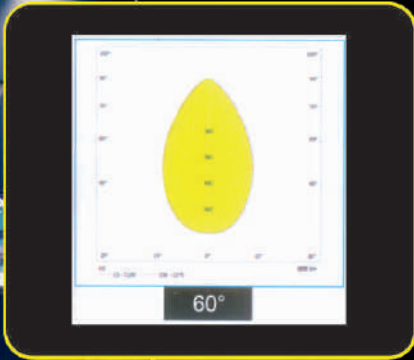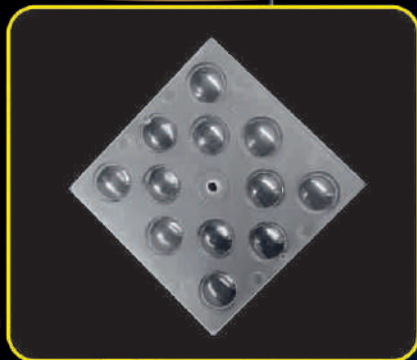


PART NUMBER	SIZE	LED MATERIAL	LED PACKAGE	LED MANUFACTURER
LP23_12X1_3030_60°-50503.7_FL6	50X50X3.7 mm	PC	3030	OSRAM LUMILEDS CREE SEOUL bridgelux

General Information

- Lens Material : Optical Grade PC (Bayer 2407)
- Luminous transmittance : 89 to 90%(ISO 135468-/ASTM D1003)
- Refractive index : 1.584 (ISO 489/ASTM D542)
- Operating Temperature range -40°C to 110°C (upper limit +130°C)
- Flammability : HB/V-o (UI94)
- If necessary, clean lenses with mild soap, water and soft cloth.
- Never use any commercial cleaning solvents on lenses, like alcohol
- Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristics.





Application

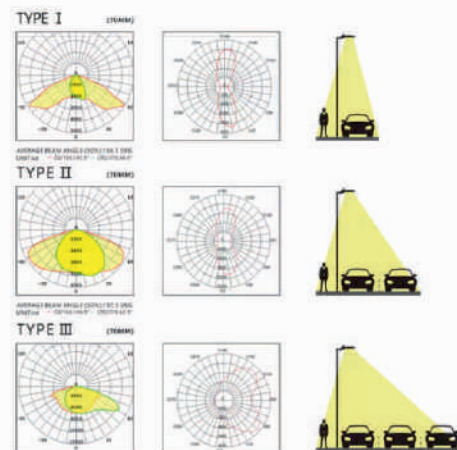


Plot No.3, Kaili Industrial Area, Main GT Road, Ballabgarh, Faridabad-121004, Haryana

+91 9711472021, 7838461601

lenspointindia@gmail.com www.lenspointindia.com

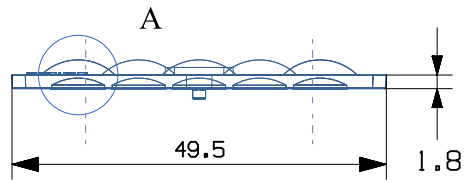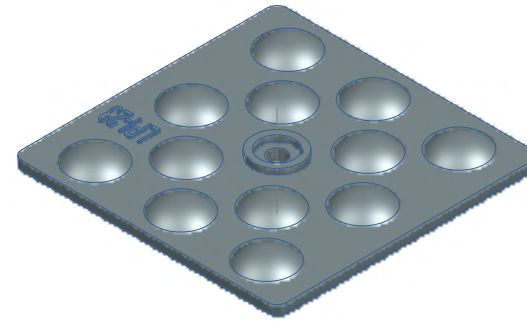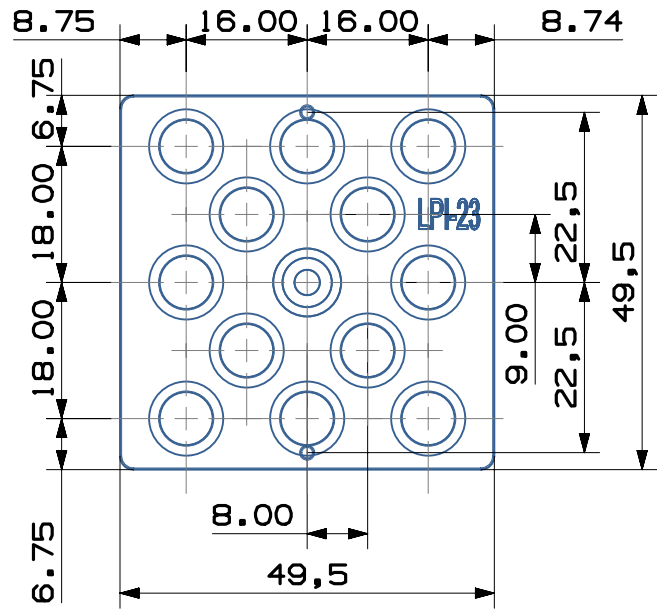

DETAIL A
SCALE 2:1

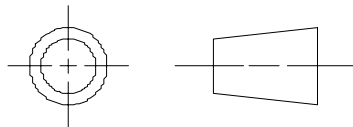

ALL DIMENSIONS IN MM



LENS POINT (INDIA) PVT. LTD.

FIRST ISSUED	29-10-2021
DRAWN BY	AJAY BIDHURI
CHECKED BY	AKASH
APPROVED BY	VISHAL MITTAL
MATERIAL	PC

TITLE		
12X1 FLOOD LIGHT LENS		
SIZE	PART NUMBER	SHEET REV
A4	LPFL-12X1_3030_60_49549542-00	A
SCALE 1:1		SHEET 1 OF 1



1

2

3

4

5

A4