





Lens Point

LENS POINT (INDIA) PVT. LTD.

60°

Flood Light Lens

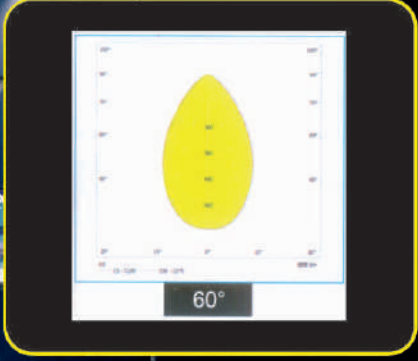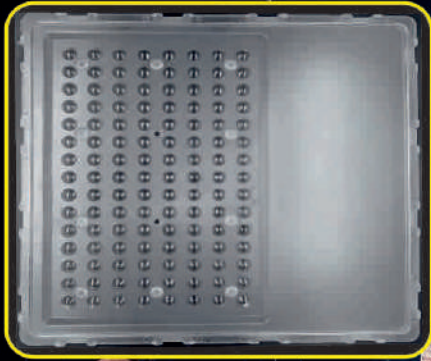


PART NUMBER	SIZE	LED MATERIAL	LED PACKAGE	LED MANUFACTURER
LP39_120X1_3030_60°-258.3268.33.7_FL10	258.3X268.3X3.7 mm	PC	3030	OSRAM LUMILEDS CREE SEOUL bridgelux

General Information

- Lens Material : Optical Grade PC (Bayer 2407)
- Luminous transmittance : 89 to 90%(ISO 135468-/ASTM D1003)
- Refractive index : 1.584 (ISO 489/ASTM D542)
- Operating Temperature range -40°C to 110°C (upper limit +130°C)
- Flammability : HB/V-o (UI94)
- If necessary, clean lenses with mild soap, water and soft cloth.
- Never use any commercial cleaning solvents on lenses, like alcohol
- Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristics.





Application

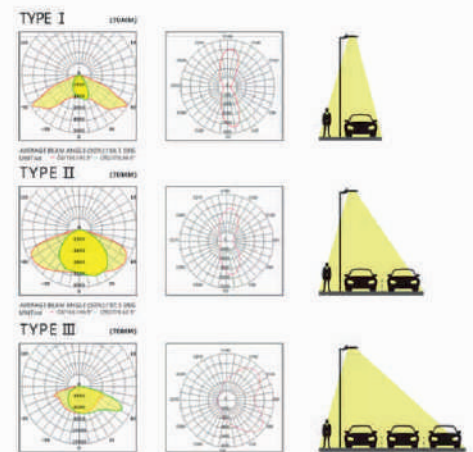

Plot No.3, Kaili Industrial Area, Main GT Road, Ballabgarh, Faridabad-121004, Haryana


+91 9711472021, 7838461601

lenspointindia@gmail.com www.lenspointindia.com

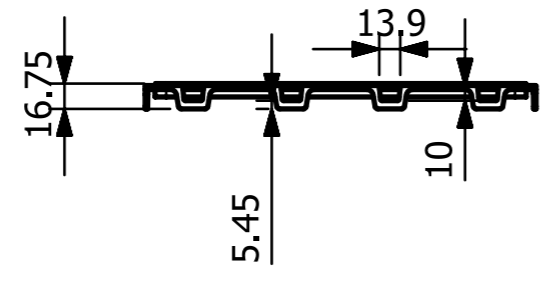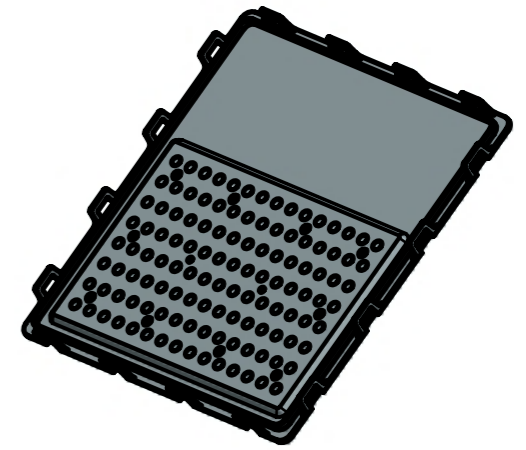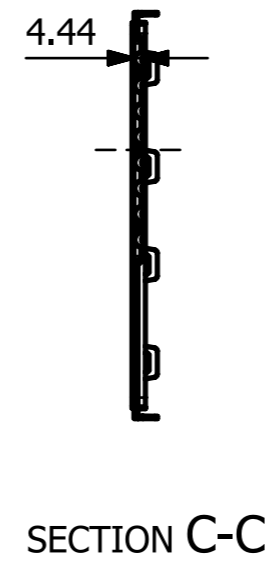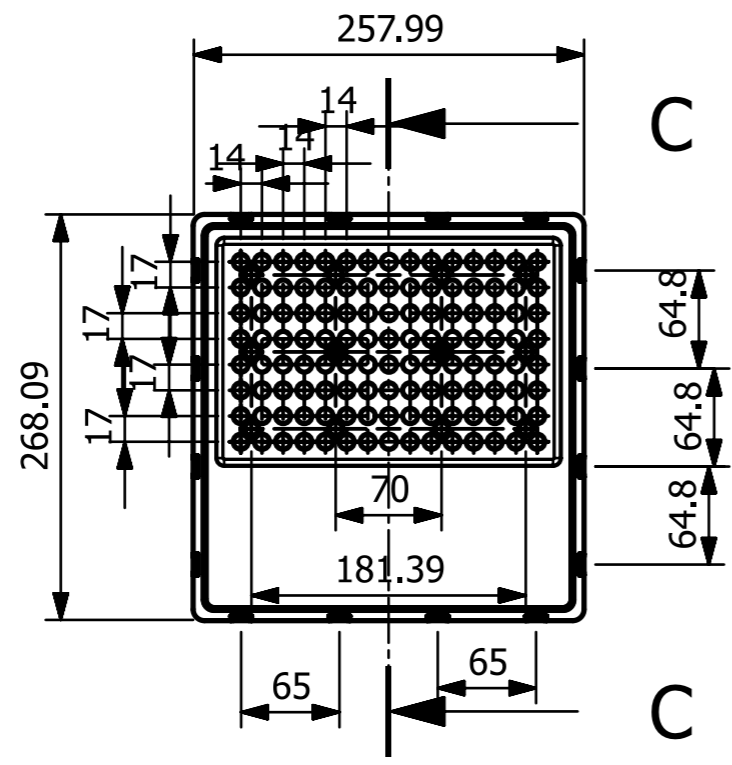

GENERAL INFO:-

1. Lens material - Optical PC
 2. Operating Temperature range -40° _ $+110^{\circ}$ (upper limit $+130^{\circ}$)
 3. Storage Temperature range -40° _ $+110^{\circ}$ (upper limit $+130^{\circ}$)
- Average Transmittance in visible spectrum 400nm-700nm>90%
- Usage and Maintenance
1. If necessary, clean lenses with mild soap, water and soft cloth.
 2. Never use any commercial cleaning solvents like Alcohol.
 3. Handle and install lenses with wearing gloves, skin oils may Damage lenses or its optical characteristics,.

		<h1>LENS POINT (INDIA) PVT. LTD.</h1>		
		Drawn By AKASH	Title - LP39_120X1_3030_60°_258.3268.33.7_FL10	
Checked by VISHAL		Approved by	Size A3	OPEN TOL.- ± 0.2 MM
Date 15-03-2022	Scale 1:5	MATERIAL - PC	ALL DIMENSIONS ARE IN MM	