





Lens Point

# LENS POINT (INDIA) PVT. LTD.

## 60°

## Flood Light Lens

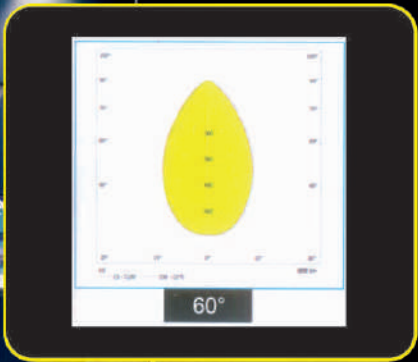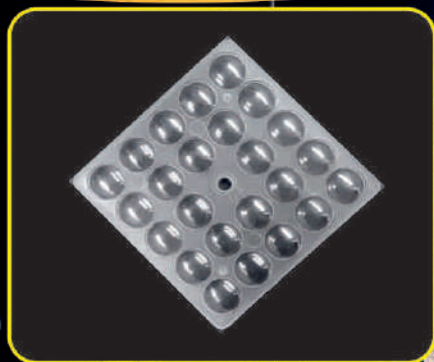


PART NUMBER	SIZE	LED MATERIAL	LED PACKAGE	LED MANUFACTURER
LP48_24X1_3030_60°-50503.7_FL16	50X50X3.7 mm	PC	3030	OSRAM LUMILEDS CREE SEOUL bridgelux

### General Information

- Lens Material : Optical Grade PC (Bayer 2407)
- Luminous transmittance : 89 to 90%(ISO 135468-/ASTM D1003)
- Refractive index : 1.584 (ISO 489/ASTM D542)
- Operating Temperature range -40°C to 110°C (upper limit +130°C)
- Flammability : HB/V-o (UI94)
- If necessary, clean lenses with mild soap, water and soft cloth.
- Never use any commercial cleaning solvents on lenses, like alcohol
- Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristics.





### Application

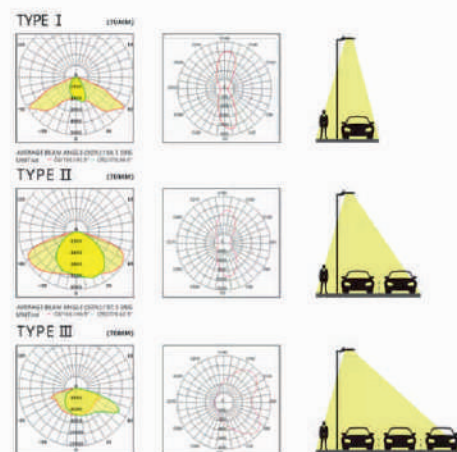

Plot No.3, Kaili Industrial Area, Main GT Road, Ballabgarh, Faridabad-121004, Haryana

+91 9711472021, 7838461601

lenspointindia@gmail.com www.lenspointindia.com

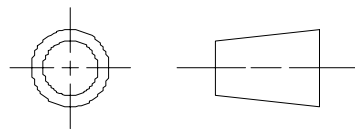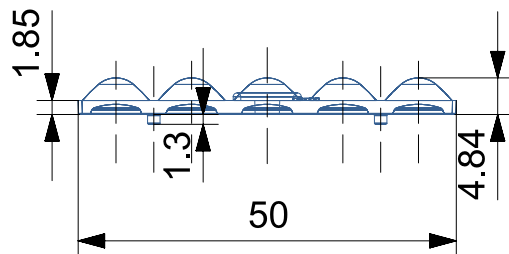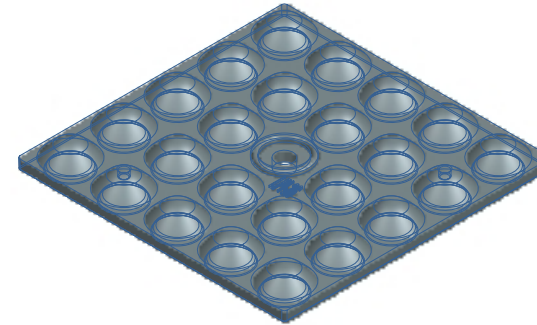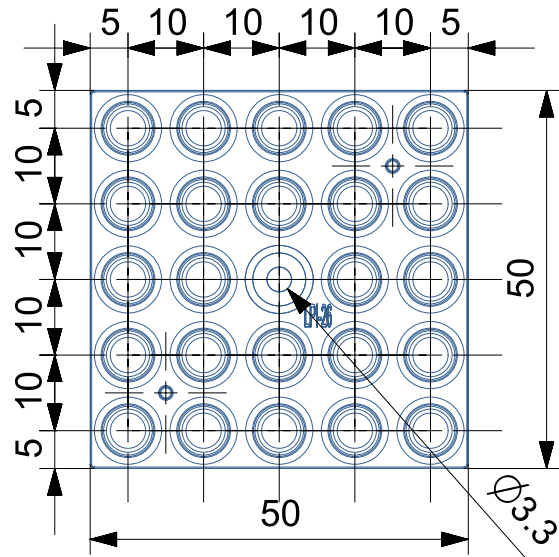

ALL DIMENSIONS IN MM



# LENS POINT (INDIA) PVT. LTD.

FIRST ISSUED	03-03-2022
DRAWN BY	AJAY BIDHURI
CHECKED BY	AKASH
APPROVED BY	VISHAL MITTAL
MATERIAL	PC

TITLE		
24X1 FL LENS 60 DEGREE		
SIZE	DRG NAME	SHEET REV
A4	LPFL-24X1-3030_60_50504.8_	A

SCALE 1:1	SHEET 1 OF 1
-----------	--------------



1 2 3 4 5 6

A

A

B

B

C

C

D

D

1 2 3 4 5 A4