



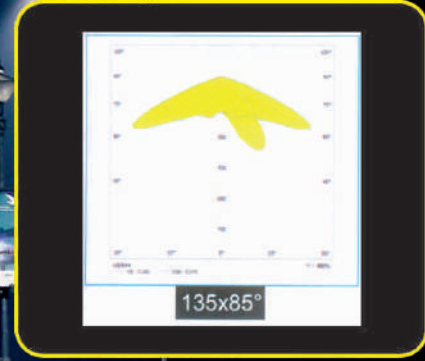

## 135X85

### Street Light Lens

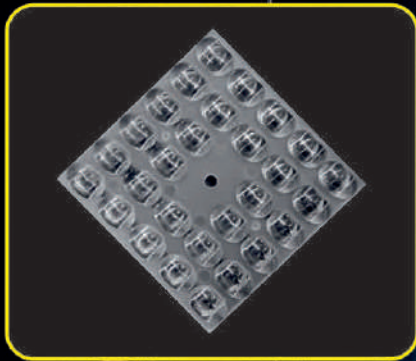


PART NUMBER	SIZE	LED MATERIAL	LED PACKAGE	LED MANUFACTURER
LP16_28X1_3030_135X85°_50504_SL3	50X50X4 mm	PC	3030	

#### General Information

#### Application




- Lens Material : Optical Grade PC (Bayer 2407)
- Luminous transmittance : 89 to 90%(ISO 135468-/ASTM D1003)
- Refractive index : 1.584 (ISO 489/ASTM D542)
- Operating Temperature range -40°C to 110°C (upper limit +130°C)
- Flammability : HB/V-o (UI94)
- If necessary, clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol
- Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristics.

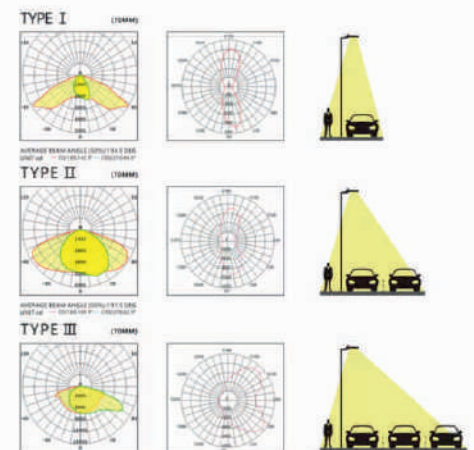


Plot No.3, Kaili Industrial Area, Main GT Road, Ballabgarh, Faridabad-121004, Haryana

+91 9711472021, 7838461601


lenspointindia@gmail.com www.lenspointindia.com

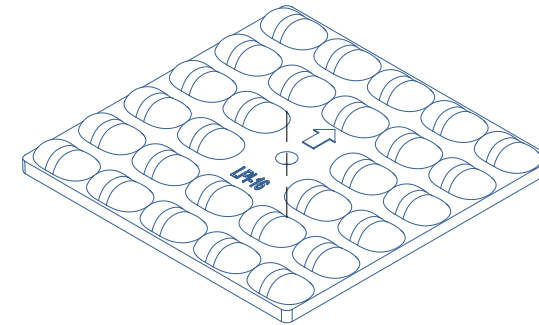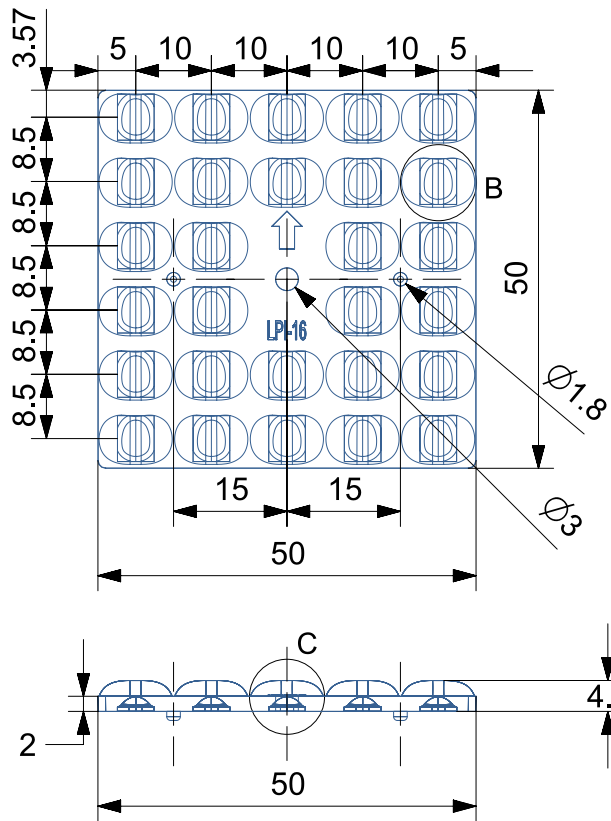

DETAIL B  
SCALE 2:1



DETAIL C  
SCALE 2:1

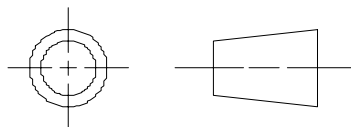

ALL DIMENSIONS IN MM



# LENS POINT (INDIA) PVT. LTD.

FIRST ISSUED	18-10-2021
DRAWN BY	AJAY BIDHURI
CHECKED BY	AKASH
APPROVED BY	VISHAL MITTAL
MATERIAL	PC

TITLE		
<b>28X1 STREET LIGHT LENS</b>		
SIZE	DRG NAME	SHEET REV
A4	<b>LPSL-28X1_3030_135X85_505042-005</b>	A

SCALE 1:1

SHEET 1 OF 1

1

2

3

4

5

A4