




Lens Point

# LENS POINT (INDIA) PVT. LTD.

## 135X85

### Street Light Lens

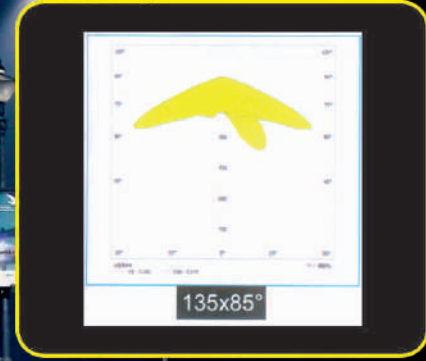


PART NUMBER	SIZE	LED MATERIAL	LED PACKAGE	LED MANUFACTURER
LP29_50X1_3030_135X85°_261124.85.5-SL9	261X124.8X5.5 mm	PC	3030	OSRAM LUMILEDS CREE SEOUL bridgetlux

#### General Information

#### Application




- Lens Material : Optical Grade PC (Bayer 2407)
- Luminous transmittance : 89 to 90%(ISO 135468-/ASTM D1003)
- Refractive index : 1.584 (ISO 489/ASTM D542)
- Operating Temperature range -40°C to 110°C (upper limit +130°C)
- Flammability : HB/V-o (UI94)
- If necessary, clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol
- Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristics.

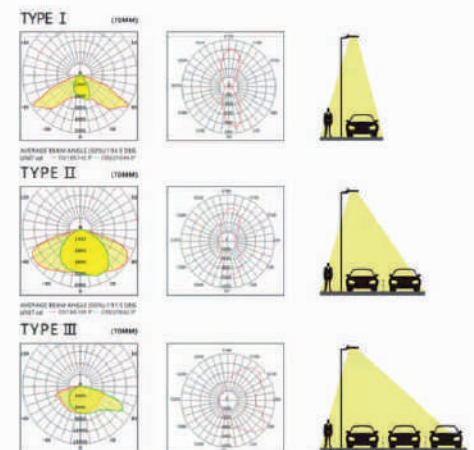


Plot No.3, Kaili Industrial Area, Main GT Road, Ballabgarh, Faridabad-121004, Haryana

+91 9711472021, 7838461601

lenspointindia@gmail.com www.lenspointindia.com

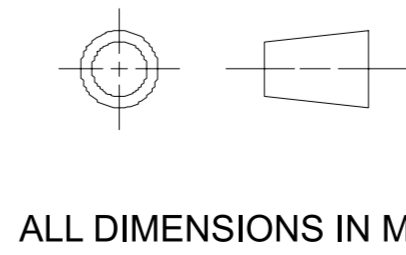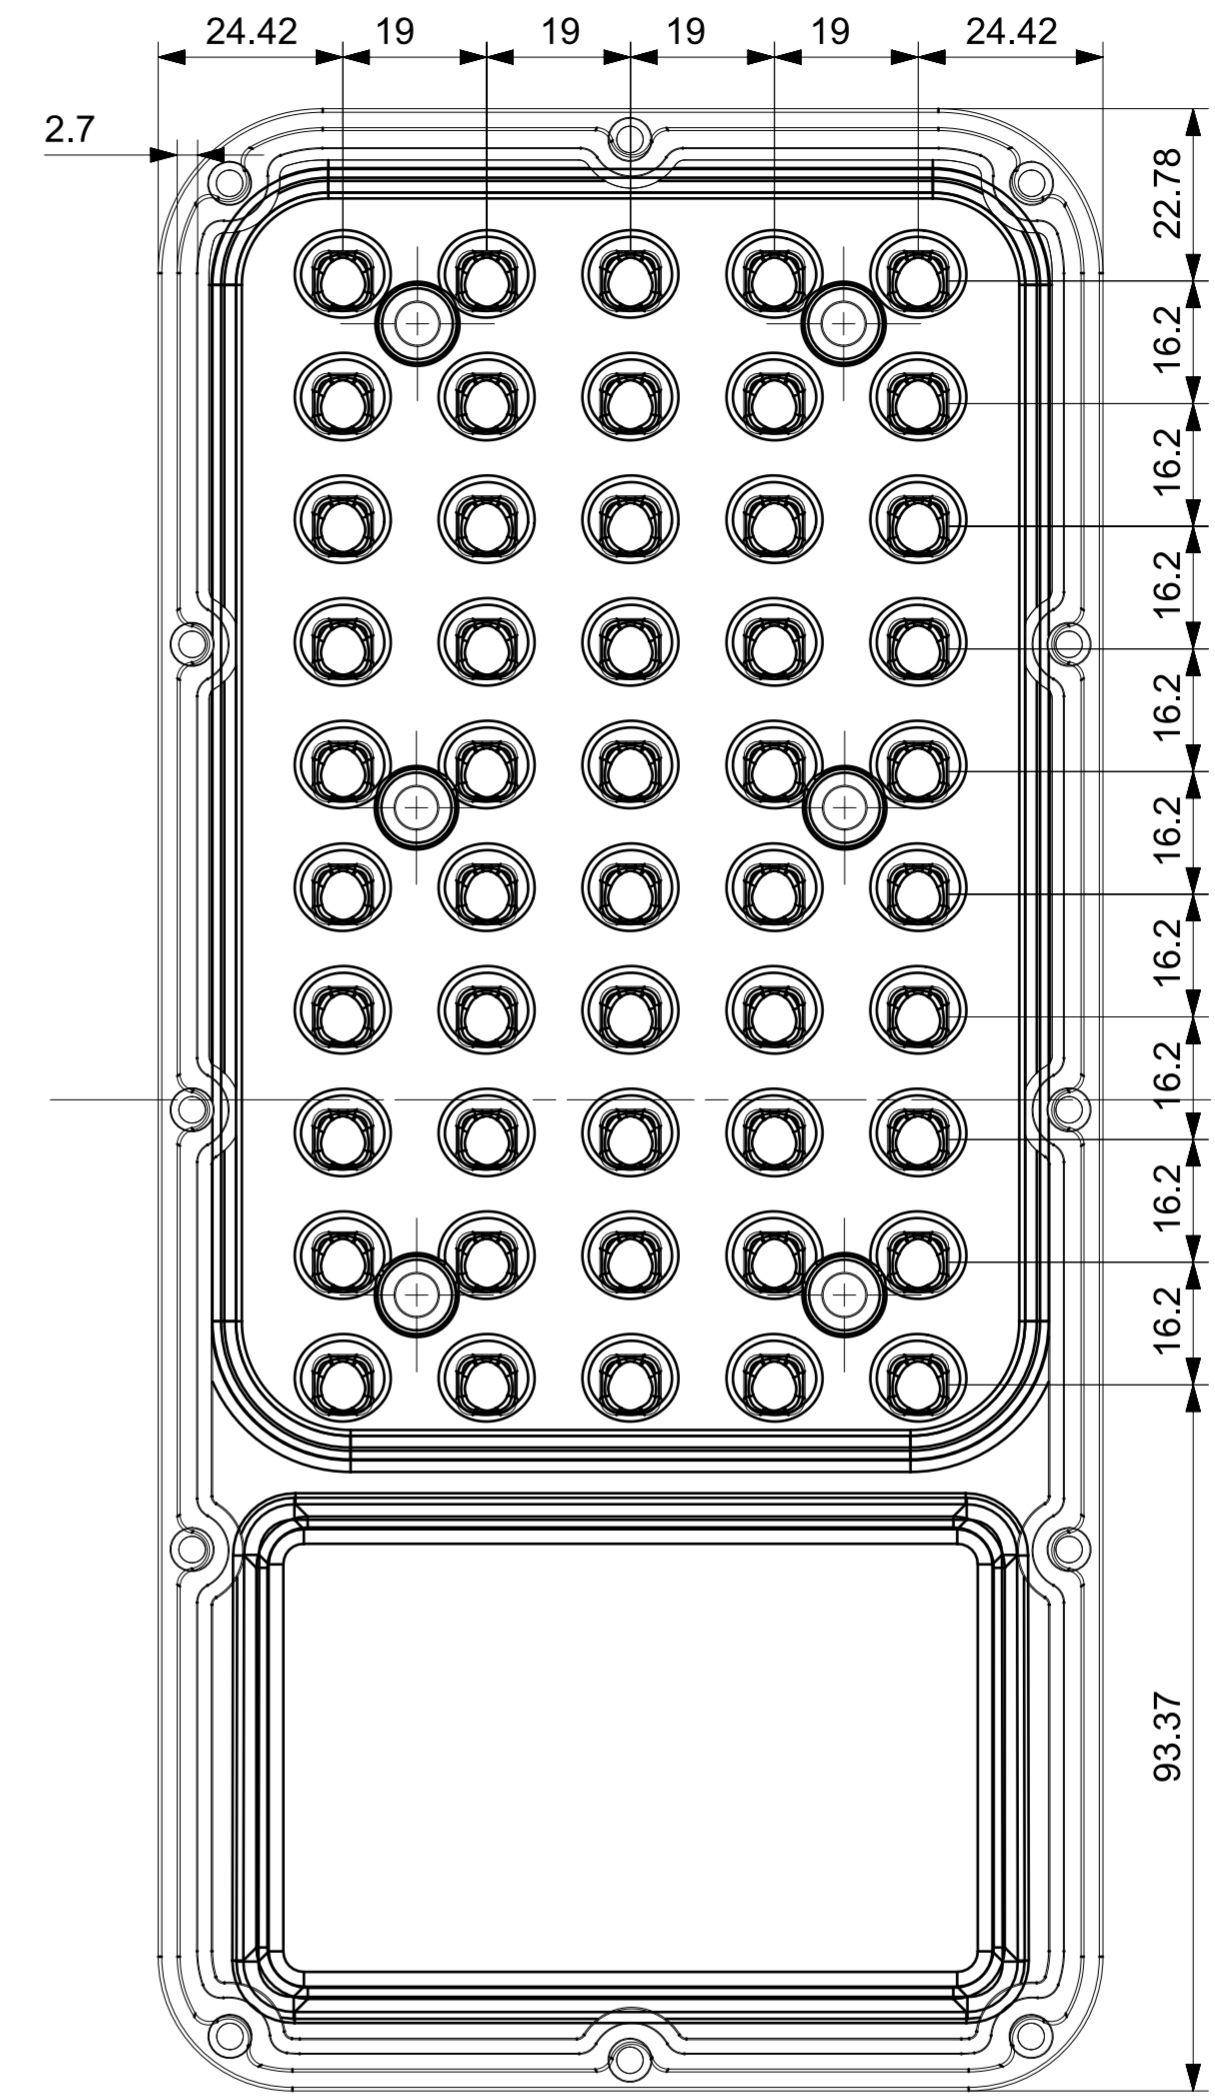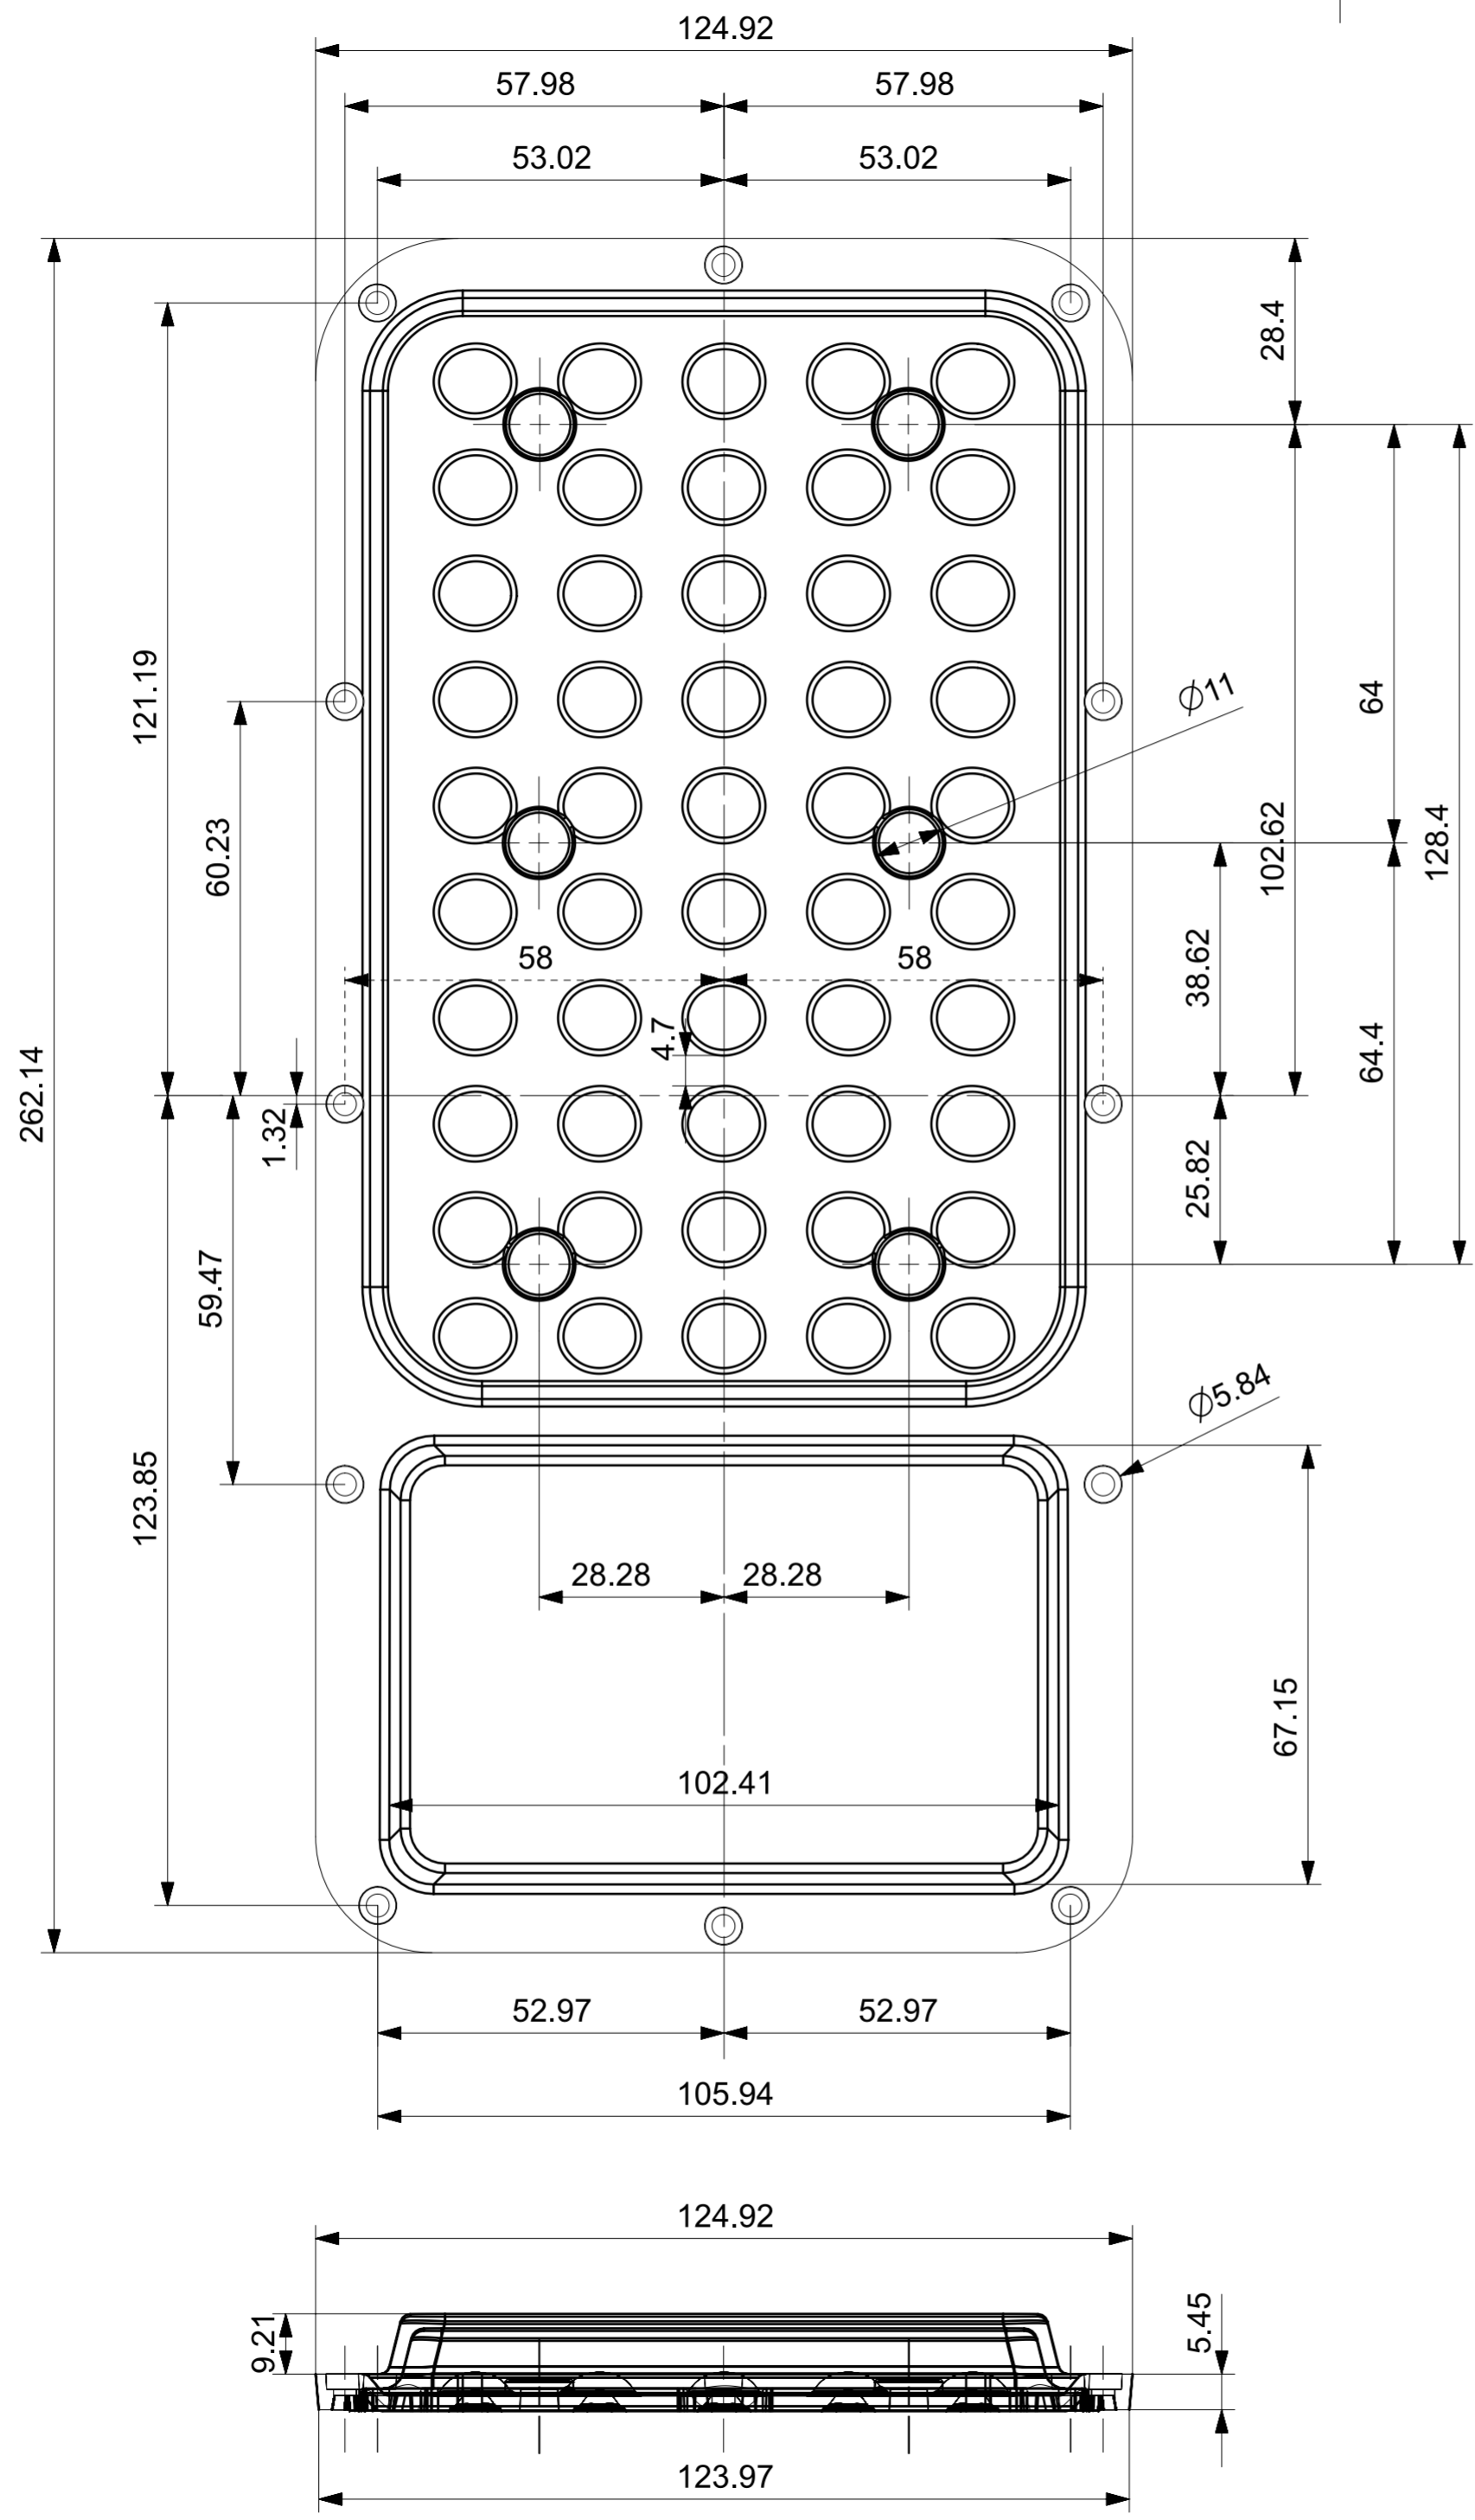

ALL DIMENSIONS IN MM

		LENS POINT (INDIA) PVT. LTD.	
		TITLE	
FIRST ISSUED	05-03-2022	50X1 SL COMPOSITE LENS	
DRAWN BY	AJAY BIDHURI	SIZE	DRG NAME
CHECKED BY	AKASH	A2	LPSL-50X1-
APPROVED BY	VISHAL MITTAL	SHEET REV	
MATERIAL	PC	A	
SCALE 1:1		SHEET 2 OF 2	

H